

nifty



HR18 4x4

**SELF PROPELLED
ACCESS PLATFORM**



18m (59ft 1in)

Working height

10m (32ft 10in)

Unrestricted working
outreach with 300kg SWL

50% Gradeability

4WD for rough terrain

GVW Only 6,300kg

Construction site friendly

5.5kVA Generator Available

Self-contained 110V supply

Swing-Out Engine Tray

Quick & easy to service

Extra-Large Platform

More room to work and
carry tools & equipment



**180° Platform Rotation
& Fly-Boom**

Maximising accuracy when
positioning platform

niftylift.com.au




nifty

Heightrider 18

The Nifty **Height Rider 18 4x4** is a heavy duty 4-wheel-drive (4WD) work platform developed specifically for applications within the construction industry. With its extra-large platform size (1.5m x 1.2m) and increased safe-working-load (300kg) the **HR18** can safely accommodate three operators, or provide extra space for two to work, leaving plenty of spare capacity for tools and equipment. The **HR18's** robust chassis design coupled with its powerful 4WD provides strength, stability and superb traction over steep or uneven surfaces, giving its operator the confidence to tackle even the toughest jobs.

SAFETY FEATURES

- Automatic Failsafe Brakes
- Tilt Alarm
- Foam Filled Tyres
- Emergency Descent System
- Dual Controls (Platform & Base)
- Lock Valves on all Hydraulic Cylinders
- Triple Harness Points
- CE Mark

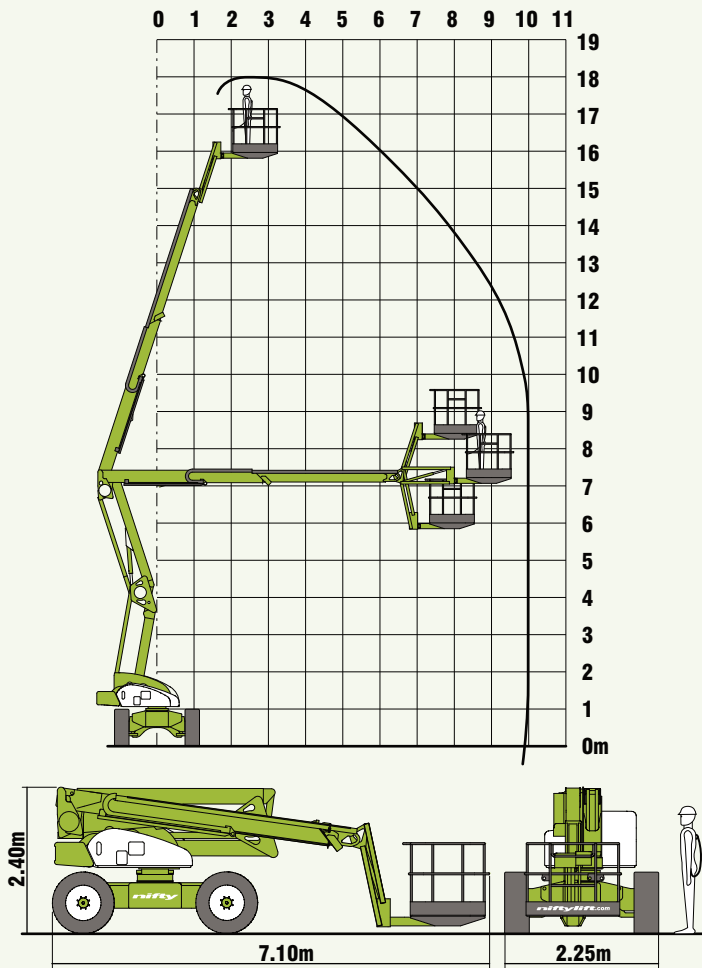

The **HR18** offers exceptional rough terrain performance due to its increased wheel size and ground clearance. Add to this a class leading working envelope and spacious 300kg capacity platform and the **HR18** stands out as one of the most robust and versatile work platforms available.

SPECIFICATIONS

| | | |
|---------------------------------|------------------------------|---------------------|
| Working Height | 18m | 59ft 1in |
| Platform Height | 16m | 52ft 6in |
| Working Outreach | 10m | 32ft 10in |
| Slew | 360° | |
| Fly-Boom Arc | 130° | |
| Width | 2.25m | 7ft 5in |
| Height | 2.40m | 7ft 10in |
| Length | 7.10m | 23ft 4in |
| Minimum Weight | 6,300kg* | 13,900lbs* |
| Turning Radius - Outside | 6.00m | 19ft 8in |
| Platform Rotation | 180° | |
| Platform Capacity | 300kg | 661lbs |
| Platform Size | 1.50m x 1.20m | 4ft 11in x 3ft 11in |
| Drive Speed | 6.6kph | 4.1mph |
| Gradeability | 50% | |
| Control System | Fully proportional hydraulic | |
| Power System | Kubota 1505 32Hp | |

* Weights may vary according to specification, please confirm before ordering.

Due to a policy of continuing development and improvement, Niftylift reserves the right to change any specification without notice. Please confirm exact specification before ordering.

Supplied by:

Manufacturers of trailer mounted,
self propelled and vehicle mounted platforms.

NIFTYLIFT PTY LTD
11 Kensington Drive
Tomago
NSW 2322
Australia

www.niftylift.com.au

e-mail: jking@niftylift.com.au

Tel.: +61 (0) 2 4964 9765

Fax.: +61 (0) 2 4964 9714

