

# nifty

# 140

## TRAILER MOUNTED ACCESS PLATFORM



**14.25m (46ft 9in)**  
Working height

**6.40m (21ft)**  
Working outreach

**Hydraulic Outriggers**  
For quick & easy setup

**Fully Proportional  
Hydraulic Controls**  
Simple, reliable &  
easy to maintain

**Bi-Energy Available**  
Optimising utilisation

**1.5m Wide Platform**  
Larger area for operator to work

**150° Fly Boom**  
Greater accuracy when  
positioning platform



[niftylift.com.au](http://niftylift.com.au)



# nifty 140

The **Nifty 140** is the first of a new generation of Nifty trailer mounts taking advantage of developments in design and build technology. It delivers outstanding reach performance without compromising on functionality or quality. With one of the largest platforms in its class and a 150° fly boom, positioning is easy and hydraulic outriggers make setting up quicker than ever before.

## SAFETY FEATURES

- Outriggers with Audible and Visible Alarms
- Manual Recovery with Hand Pump
- Dual Controls (Platform & Base)
- Lock Valves on all Hydraulic Cylinders
- Overrun Brakes with Gas Spring Hand Brake
- Dual Harness Points
- CE Marked



The Bi-Energy power option improves utilisation for the **140** by allowing operation in discreet and fume free environments or for extended periods where no external power source is available.





Hydraulic outriggers allow quick and easy setup and the audible alarm ensures that the operator is aware of an incorrect setup, when working in the busiest of environments.

## SPECIFICATIONS

<b>Working Height</b>	14.25m	46ft 9in
<b>Platform Height</b>	12.25m	40ft 2in
<b>Working Outreach</b>	6.40m	21ft
<b>Slew</b>	360°	
<b>Fly Boom Arc</b>	150°	
<b>Width - Travelling</b>	1.60m	5ft 3in
<b>- Working</b>	3.20m	10ft 6in
<b>Height</b>	2.00m	6ft 7in
<b>Length</b>	6.75m	22ft 2in
<b>Weight</b>	1,500kg*	3,300lbs*
<b>Platform Capacity</b>	225kg	500lbs
<b>Platform Size</b>	1.50m x 0.70m	4ft 11in x 2ft 4in
<b>Control System</b>	Fully Proportional Hydraulic	
<b>Power System</b>	Mains Only Battery Only Petrol or Diesel Only Bi-Energy (Engine & Battery)	
<b>Drive Option</b>	Traction Drive	

\* Weights may vary according to specification / power options, please confirm before ordering.

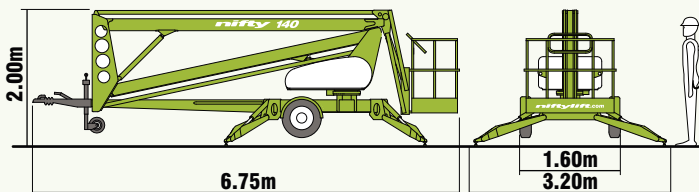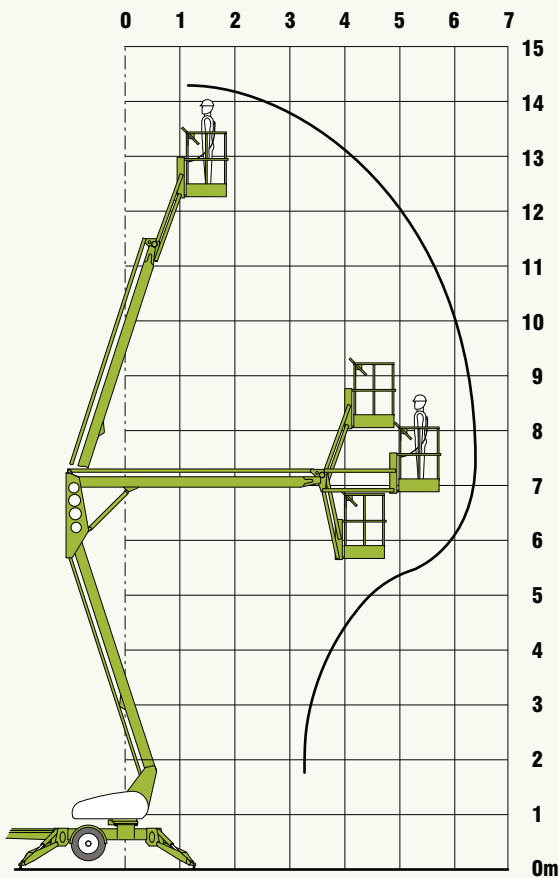

Due to a policy of continuing development and improvement, Niftylift reserves the right to change any specification without notice. Please confirm exact specification before ordering.

Supplied by:

Manufacturers of trailer mounted, self propelled and vehicle mounted platforms.

**NIFTYLIFT PTY LTD**  
11 Kensington Drive  
Tomago  
NSW 2322  
Australia

[www.niftylift.com.au](http://www.niftylift.com.au)

e-mail: [jking@niftylift.com.au](mailto:jking@niftylift.com.au)

Tel.: +61 (0) 2 4964 9765

Fax.: +61 (0) 2 4964 9714

